


PRODUCT FEATURES



- Proprietary New Trench Technology
- $R_{DS(ON),typ}=9.3m\Omega@V_{GS}=10V$
- Low Gate Charge Minimize Switching Loss
- Fast Recovery body Diode

APPLICATIONS

- High efficiency DC/DC Converters
- Synchronous Rectification
- UPS inverter

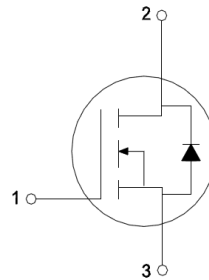

1.GATE
2.DRAIN
3.SOURCE

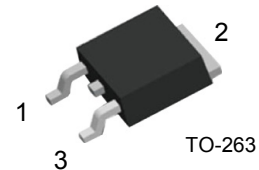

Type	V _{DS}	I _D	R _{DS(ON)} .max T _J =25°C	T _{Jmax}	Marking	Package
MM4115K	150V	115	11mΩ	175°C	MM4115K	TO-220
MM4115S	150V	115	11mΩ	175°C	MM4115S	TO-263

ABSOLUTE MAXIMUM RATINGS

T_C = 25°C unless otherwise specified

Symbol	Parameter/Test Conditions	Values	Unit	
V _{DSS}	Drain Source Voltage	T _J =25°C	150	V
V _{GSS}	Gate Source Voltage		±20	
I _D	Continuous Drain Current	T _C =25°C(Silicon limited)	115 ^①	A
		T _C =100°C(Silicon limited)	81 ^①	
I _{DM}	Pulsed Drain Current at V _{GS} =10V	Limited by T _{Jmax}	511	
P _D	Maximum Power Dissipation		375	W
E _{AS}	Single Pulse Avalanche Energy (V _{DD} =50V, L=1mH)		1093	mJ
T _{Jmax}	Max. Junction Temperature		175	°C
T _{STG}	Storage Temperature Range		-55~175	
Torque	Module to Sink (TO-220)	Recommended (M3)	1.1	Nm
Weight			2.5	g

① Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 80A.

THERMAL CHARACTERISTICS

T_C = 25°C unless otherwise specified

Symbol	Parameter/Test Conditions	Values	Unit
R _{thJC}	Thermal resistance, junction to case	0.4	°C/W
R _{thJA}	Thermal resistance, junction to ambient	62	

ELECTRICAL CHARACTERISTICS

 $T_C = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	150			V
$R_{DS(ON)}$	Drain Source ON Resistance	$V_{GS}=10V, I_D=62A$		9.3	11	m Ω
I_{DSS}	Drain Source Leakage Current	$V_{DS}=150V, V_{GS}=0V$			25	μA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}, I_D=250\mu A$	3.0		5.0	V
I_{GSS}	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 20V$	-100		100	nA
R_{gint}	Integrated Gate Resistor			4.1		Ω
Q_g	Total Gate Charge	$V_{DD}=75V, I_D=62A, V_{GS}=10V$		135		nC
Q_{gs}	Gate Source Charge			48		nC
Q_{gd}	Gate Drain Charge			43		nC
g_{fs}	Forward Transconductance	$V_{DS}=10V, I_D=62A$		TBD		S
C_{iss}	Input Capacitance	$V_{DS}=25V, V_{GS}=0V, f=1\text{MHz}$		6.2		nF
C_{oss}	Output Capacitance			700		pF
C_{rss}	Reverse Transfer Capacitance			120		pF
$t_{d(on)}$	Turn on Delay Time	$V_{DD}=98V, I_D=62A,$ $R_G=2.2\Omega,$ $V_{GS}=10V$	$T_J=25^\circ\text{C}$		48	ns
t_r	Rise Time				139	ns
$t_{d(off)}$	Turn off Delay Time				150	ns
t_f	Fall Time				60	ns

Source-Drain BODY-DIODE CHARACTERISTICS

 $T_C = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
I_{SD}	Continuous Source Drain Current				115	A
I_{SDM}	Pulse Source Drain Current	Limited by T_{Jmax}			511	A
V_{SD}	Forward Voltage	$I_S=62A, V_{GS}=0V$			1.2	V
t_{rr}	Reverse Recovery time	$I_F=62A, V_{GS}=0V$		60		ns
Q_{RR}	Reverse Recovery Charge	$di_F/dt=-100A/\mu s$		100		nC

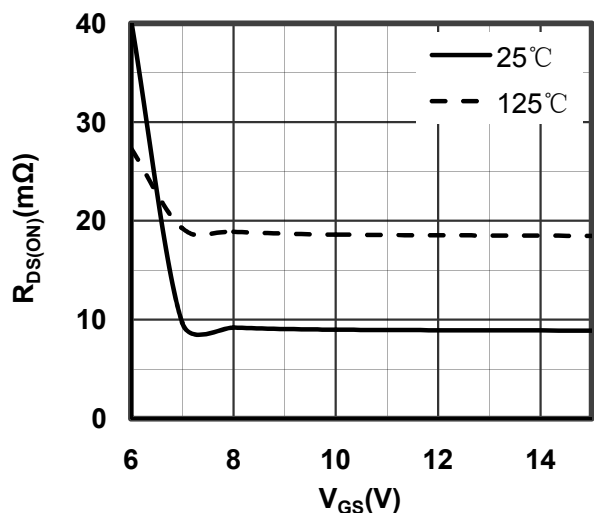


Figure 1. Typical $R_{DS(ON)}$ vs Gate Voltage

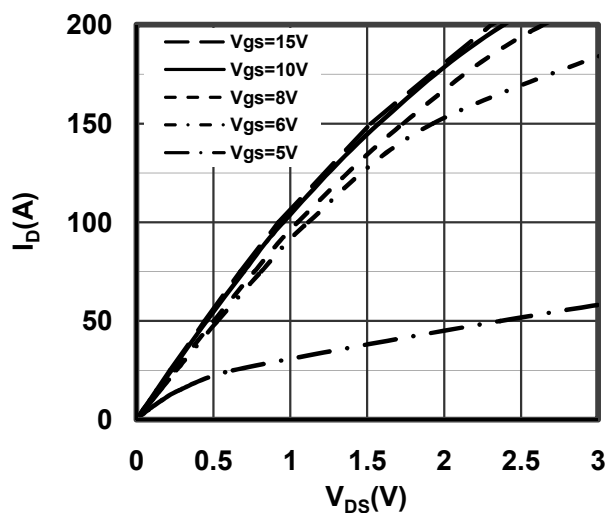


Figure 2. Typical Output Characteristics

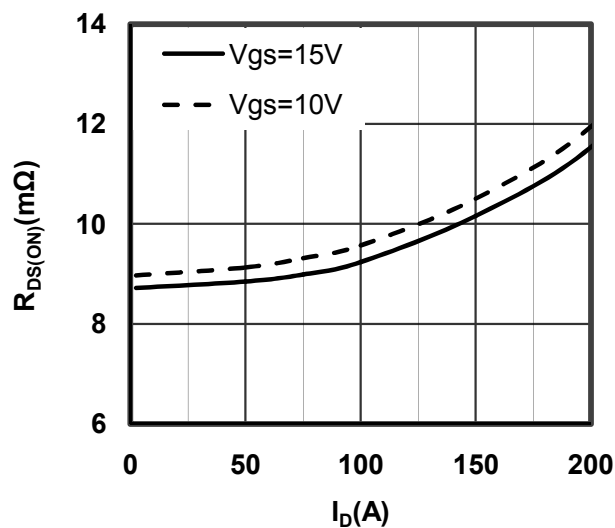


Figure 3. Drain-Source ON Resistance vs I_D

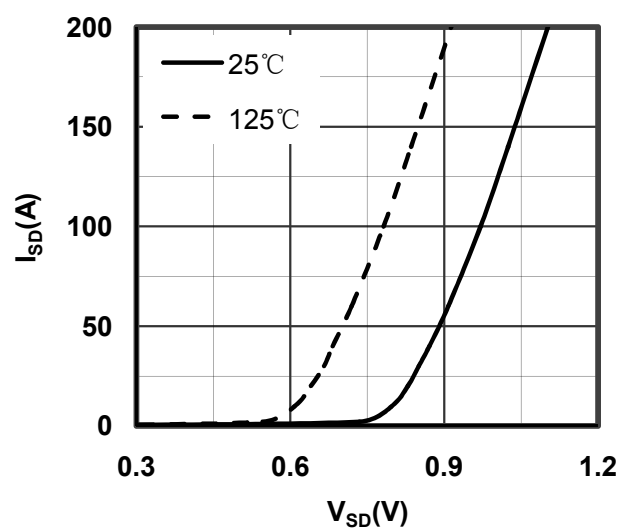


Figure 4. Source-Drain Voltage

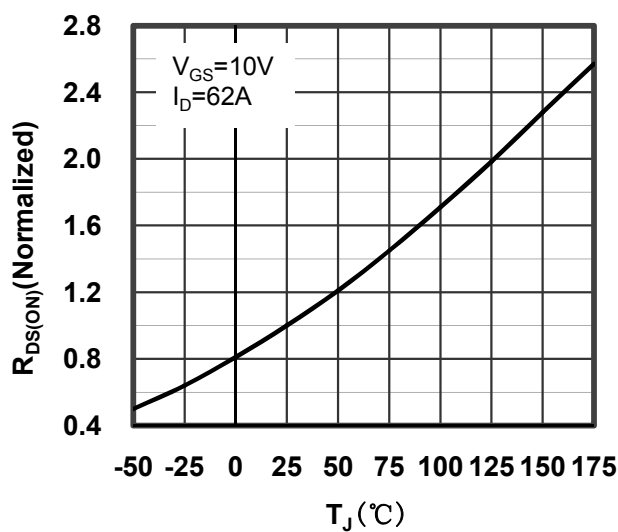


Figure 5. Drain-Source ON Resistance vs Junction Temperature

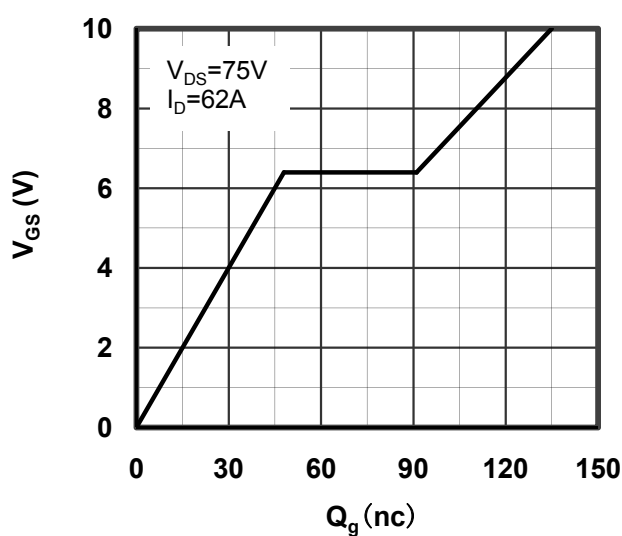


Figure 6. Gate Charge characteristics

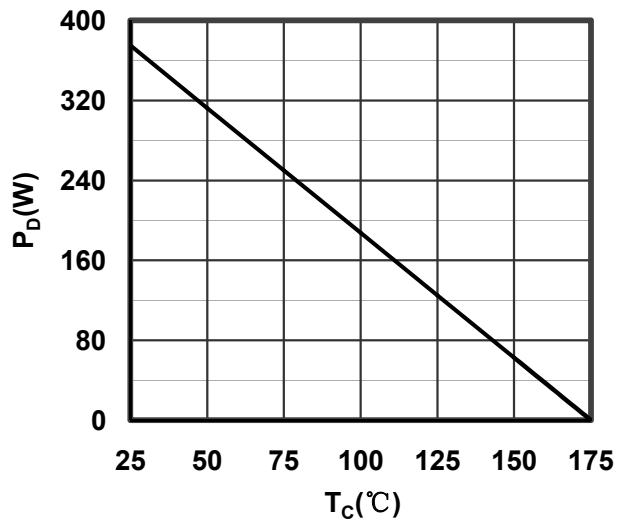


Figure 7. Maximum Power Dissipation vs Case Temperature

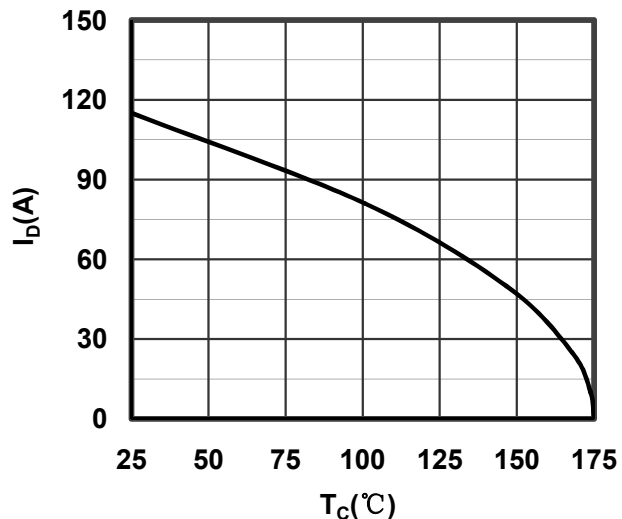


Figure 8. Maximum Continuous Drain Current vs Case Temperature

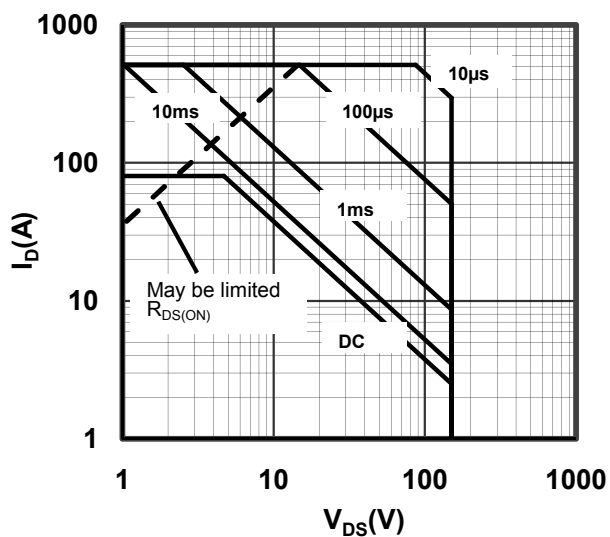


Figure 9. Maximum Forward Safe Operation Area


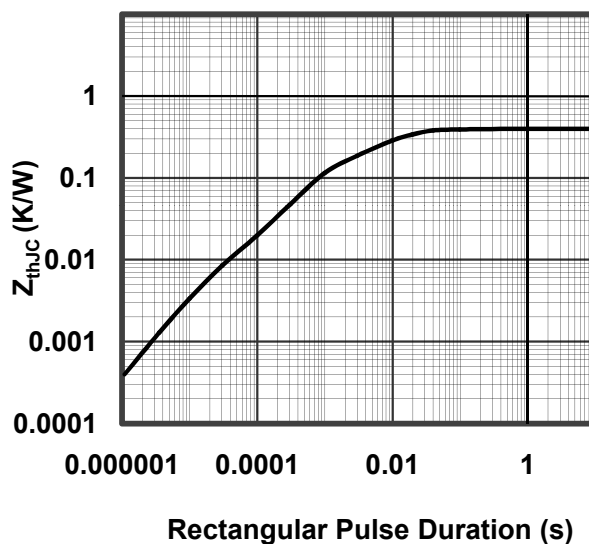


Figure 10. Transient Thermal Impedance

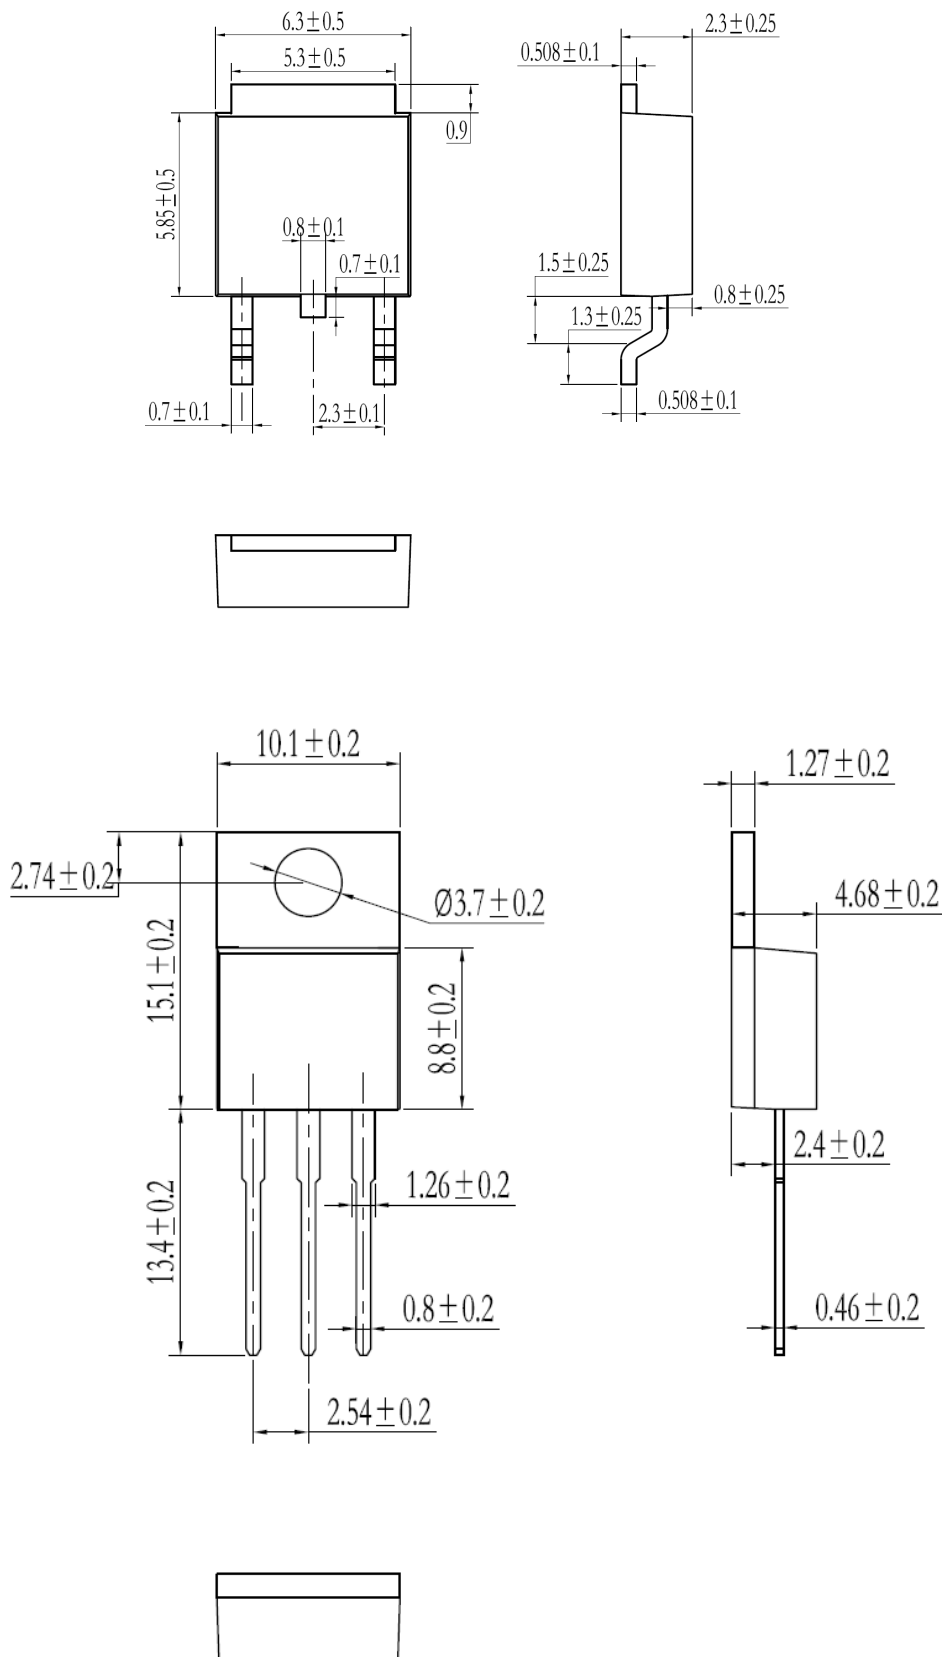

Dimensions in (mm)
Figure 11. Package Outline